


The Fulton™ Lathe Dust Collection Hood works on lathes with large or small swings. To the right the illustrations show the slots which allow for easy adjustment of the height of the dust hood. Using the bolts and wing nuts provided, the Bracket is mounted to the dust hood - either short side down or long side down, depending on where you want to locate the dust hood. Once the bracket is attached to the dust hood, you simply attach the studded magnetic plate to the bottom side of the bracket as shown to the right. The lathe dust hood can now be mounted to the lathe bed or even the lathe tool rest holder (depending on the size of your lathe). The clear plastic shield is installed with push pins (included) from both sides of the hood. This setup allows the shield to be moved out of the way or back into place at your convenience.

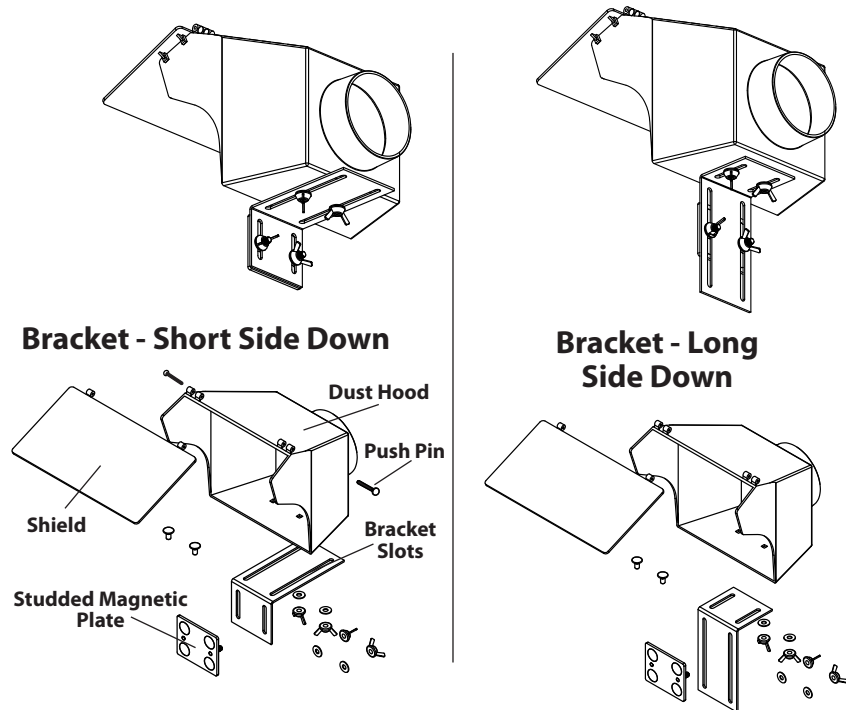

Note: The shield should always be in the down position when cutting materials on the lathe. Flip the shield up when sanding or finishing if desired. The port on the back side measures 4" O.D. for attaching standard 4"

hose to it. With a dust collection adaptor (not included) you may reduce down to a smaller hose size if desired. Reducers are available at most woodworking retail stores.

CAUTION:

Please read, understand, and follow all manufacturers instructions, guidelines and owners manuals that come with your power tools. Fulton™ Woodworking Tools & Accessories and its subsidiaries assume no liability for accidents or injuries caused by improper use of this product.

Fulton™ Woodworking Tools & Accessories
P.O. Box 921487
Norcross GA 30010
www.fultonwoodworkingtools.com