

PRO-GRIP

Straight Edge Guides & Accessories

Router Plate Mounting Instructions

Router Plate Includes:

- 1 each clear acrylic plate
- 1 each track guide bar
- 8 each set screws
- 1 each hex key wrench

Things you will need:

- screwdriver
- 2" spring clamps
- power drill
- drill bit and countersink bit
(sizes vary depending on hole size of your routers base plate)
- scrap piece of wood

CAUTION

Please read, understand, and follow all manufacturers instructions, guidelines and owners manuals that come with your power tools. PRO-GRIP and its subsidiaries assume no liability for accidents or injuries caused by improper use of this product. Always be sure to UNPLUG your router before making any adjustments.



Step 1

Position the router on the Pro-Grip Router Base to determine the desired router handle positioning. Place tape on the router base plate to show the operator front side.




Step 5

Flip the Pro-Grip Router Base so the bottom is facing up and counter sink the holes so that the router mounting screw heads do not protrude above the router base surface.



Step 2

Unscrew the existing base plate on the router. This will be used as a drill jig to mount the router to the Pro-Grip Router Base.

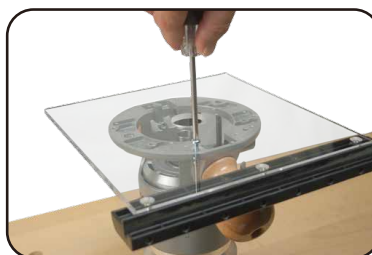

Step 6

Mount the router to the Pro-Grip Router Base without using your original router base plate. Make sure the router mounting screws are tight and they do not protrude above the Pro-Grip Router Plate Base before using the system.



Step 3

Center the router base plate over the center hole on top of the Pro-Grip Router Base Plate and clamp in place with spring clamps.



Step 7

Place the mounted plate and router on to the track of your Pro-Grip Clamp. Using the set screws and hex key wrench, install the set screws and adjust them to achieve a perfect fit to the track. Adjust the set screws so the plate slides smoothly with very little or no play.



Step 4

Using a drill bit approximately the size of the holes on the router base plate, use the router base plate as a guide to drill through the Pro-Grip Base. Use a piece of scrap wood on the under side of the Pro-Grip Base to prevent chipping.



Step 8

Once the plate has been installed on to your router, you can begin making perfect straight line cuts without worrying about drifting or slipping.

No specific mounting holes or fasteners to mount tools are provided. Follow power tool manufacturer safety recommendations. Always wear proper safety equipment.